



FBD Partnership, LP | 866.323.2777 | sales@fbdfrozen.com | fbdfrozen.com

564 SPECIFICATIONS

DIMENSIONS

Countertop unit: Width: 26.0 in (660 mm)

Depth: 32.4 in (822 mm)

Height: 41.4 in (1052 mm) (with merchandiser door)

CAPACITY (60Hz)

Barrel size: 176 oz

Continuous draw (alternating barrels): 3,840 oz/hour

Recovery time: 4 minutes

ELECTRICAL REQUIREMENTS

200 to 245 VAC single phase; 3 wire, 30 amp

REFRIGERATION

19,000 BTU/Hr, R-404A(50Hz) 19,000 BTU/Hr, R-404A(60Hz)

SPACE REQUIREMENTS

Sides and back: 2.0 in (51 mm) minimum

Top: 12.0 in (305 mm) minimum

WEIGHT

Operating unit: 460 lb (208.7 kg) Base cabinet: 97 lb (36.3 kg)

SYRUP CONNECTION

Bag-In-Box (BIB)

MOTORS 60Hz (50Hz)

Beater: (4) 1/6 HP (120 w) Fan: (1) 1/4 HP (135 w)

WATER REQUIREMENTS

Fresh water, minimum 3/8" supply, 30 psi flowing, (207 kPa)

OPTIONAL ACCESSORIES

Base cart (Part #12-2899-0001)

Leg kit (set of four) (Part #12-2533-0001)


Painted or stainless steel side panels

Water-cooled unit

Merchandiser options (see spec sheet)

Bib rack



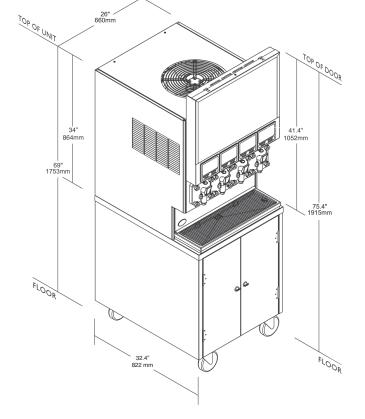









PRODUCT FEATURES



- Inline Carbonation[™] creates a more consistent over-run, quality and yield
- AccuFreeze[™] maintains product consistency, delivering the most consistent frozen beverage, drink after drink
- RapidFreeze[™] Cold chamber system improves recovery and draw-time, while reducing the compressor workload, and increasing dispenser durability
- Electronic Simplicity offers easy-to-use keypad interface
- Optimal Use of Counter Space with minimum ventilation of two inches side or back
- Scroll[™] Compressor provides more reliable operation, and fewer moving parts than reciprocating compressors
- Customizable individual barrels allows for hundreds of different drink profile combinations, including sugar free options

