

# **MODEL SLX400E**

These slim line soft serve machines produce the best tasting highest quality frozen dessert. Offer your guests smooth creamy consistent yogurt, ice cream, custard or sorbet! The 22" wide footprint allows for more units in a smaller space. The perfect yogurt shop freezer is great for adding flavors to ice cream shops, too! Great for QSRs, retirement villages and hospital cafeterias.

# **The Electro Freeze Advantage**

- Innovative Solutions providing the Best product quality in the industry.
- Meets ADA Specifications for self service applications
- Precision dual Smart control monitors
   Temperature and Consistency to provide
   superior taste and quality.
- Multi-function LED display with manager smart tools.
- Superior low temp refrigeration system provides Best in class production and product quality
- Compact design with a small foot print.
- **Twist feature** will dispense two separate flavors or equal combinations of both.
- Self-closing handles eliminate waste
- Patented auger gently blends reducing agitation and maintaining product quality and consistency.
- Durable polymer, long wearing nonreversible blades offer lower maintenance costs and better product quality
- Simple to operate and easy to clean
- Experience Tells Electro Freeze has been manufacturing quality frozen treat machines since 1929. Superior engineering, product innovations, sturdy construction, quality craftsmanship and dependable performance are Electro Freeze hallmarks.


# SOFT SERVE FREEZER GENESIS SERIES™

featuring

VQM™
Virtual Quality
Management System™



Let VQM help manage your frozen dessert business more effectively.

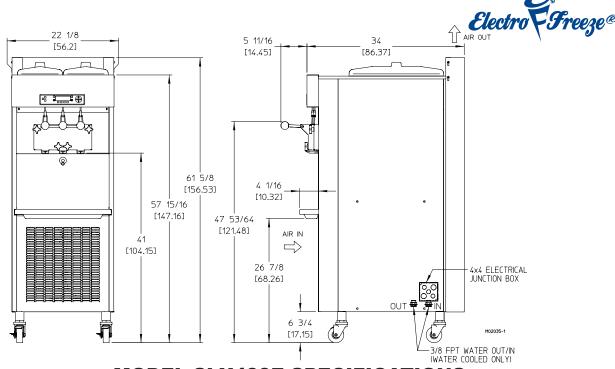

# **MODEL SLX400E SPECIFICATIONS**

Due to continual product improvements all specifications are subject to change without notice.

Weights	lbs.	kgs.	
Net	470	213	
Crated	568	257	
	cu.ft.	cu.m.	
Volume	58.42	1.65	
Dimensions	in.	cm	
Width	22-1/8	56.20	
Depth	30-1/8	76.52	
Height	60-11/16	154.15	

Electrical	Maximum		NEMA
	Fuse Size		Plug Type
208-230/60/1 Air	16		6-20P
208-230/60/1 Water	16		6-20P
	Total		Poles (P)
	Amps (Qty)	kW	Wires (W)
220-240/50/1 Air	15.0	3.1	2P 3W
220-240/50/1 Water	15.7	3.2	2P 3W

Electrical characteristics other than above available on request from factory or local distributor. Check nameplate for exact electrical data.

В	i	d	d	i	n	a	S	n	e	c
_		ч	ч			ч	•	w	╚	•

Electrical: Volt	Hz	Ph	
Cooling:	_ Neutral	Yes	No
Options:			

#### **Electrical**

One dedicated electrical connection is required. 60 Hertz units connects to a standard NEMA 6-20R receptacle. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

## **Beater Motor**

Two, 1 hp.

## **Refrigeration Systems**

One, 6,900 Btuh. R404a.

Btuh may vary depending on compressor used.

## **Air Cooled**

 $6"\,(15.2~\mbox{cm})$  air space required on rear panel for proper air circulation and be open on the top.

Mix Hopper Capacity: two - 12 quarts (11.4 liters) each Freezing Cylinder Capacity: two - 2.7 quarts (2.6 liters) each

Certified and/or listed by:







\*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-M91 (R2008)

\*\*Selected voltages only. Contact H.C. Duke to verify agency needs.



## Electro Freeze div. of H.C. Duke & Son, LLC

2116-8th Avenue, East Moline, Illinois 61244 USA Phone (309) 755-4553 • (800) 755-4545 FAX (309) 755-9858

E-mail: sales@electrofreeze.com • www. electrofreeze.com

**Authorized Distributor**